







## Thin wafer swing check valve

**Fig.614 : without spring**

**Fig.615 : with spring**



[www.coreline.dk](http://www.coreline.dk)



# General applications and specifications

## General applications

- Petrochemical
- Marine
- Offshore
- Heating
- Water
- Fire protection



## Specifications

|                                 |   |
|---------------------------------|---|
| Nominal diameter:               | DN40-DN1000   |
| Standard differential pressure: | 16bar for DN40-DN200,<br>10bar for DN250-DN1000   |
| Maximum differential pressure:  | 40bar for DN40-DN100<br>25bar for DN125-DN600<br>16bar for DN700-DN1000                           |
| Opening pressure:               | 7mbar for horizontal installation<br>12~44mbar for vertical installation                          |
| Flange accommodation:           | EN1092-1 PN10/PN16/PN25/PN40, ASME B16.5 CLASS150   |
| Face to face:                   | Industrial standard   |
| Temperature range:              | -40°C to +450°C (depending on pressure, medium and material)                                      |
| Tightness test:                 | Rubber seated: ISO 5208 Rate A, API 598 Table 6<br>Metal seated: ISO 5208 Rate D, API 598 Table 6 |



## Index

|        |  |
|--------|--|
| page 3 | Design features                                  |
| page 4 | Part list and chart for medium resistance        |
| page 5 | Fig. 614 Dimensions                              |
| page 6 | Fig. 615 Dimensions                              |
| page 7 | Pressure loss                                    |
| page 8 | Opening pressure and pressure temperature rating |

# Design features

## Features

**High quality and reliability** with certificate, robust construction and excellent finish


**Flexibility and low weight** because of short face-to-face dimension

**Minimum head loss** due to straight flow direction

**Resistance to aggressive media** with many material options

**Self-centering** over the outside diameter of body

**1-pc body design** makes it easy for recycling

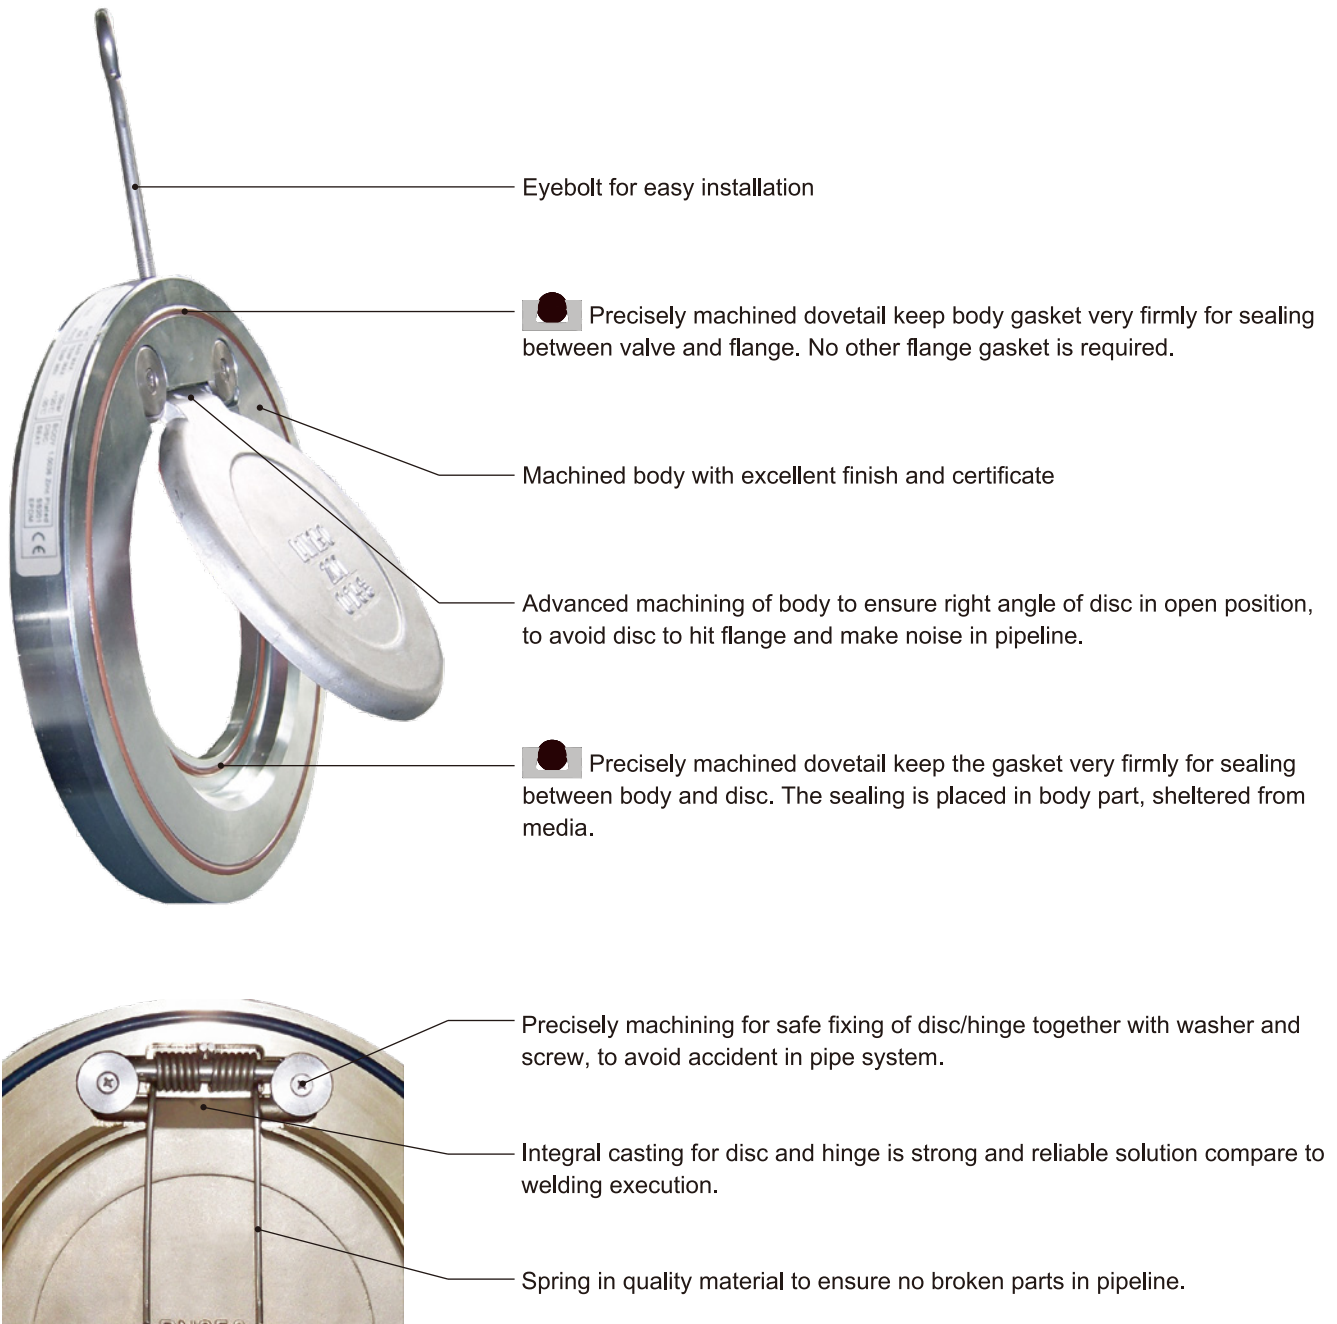

# Part list and chart for medium resistance

Fig. 614


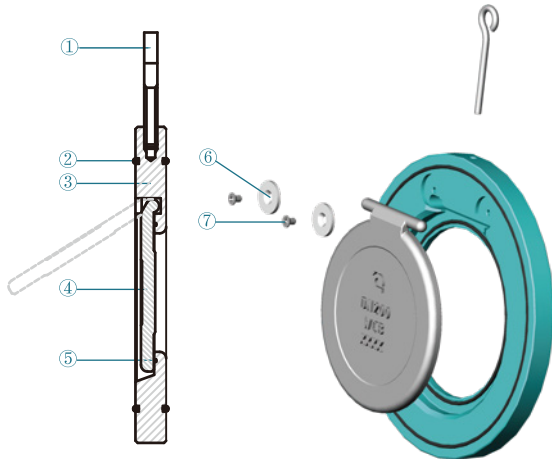


Fig. 615

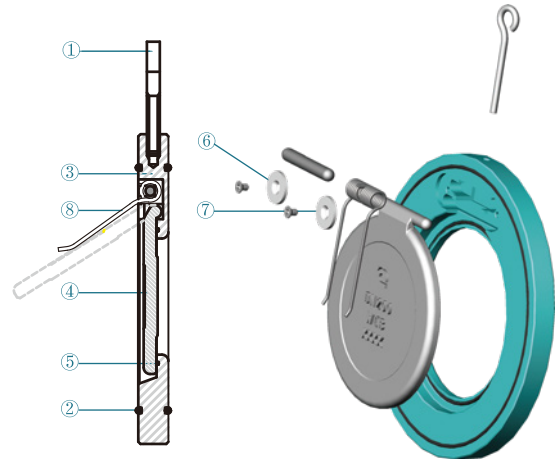


| No.             | Part name | Description     | Material     | No. | Part name       | Description     | Material        |             |             |        |
|-----------------|-----------|-----------------|--------------|-----|-----------------|-----------------|-----------------|-------------|-------------|--------|
| 1               | Eye bolt  | Stainless steel | SS316        | 5   | Seat            | -20°C~85°C      | NBR             |             |             |        |
|                 |           |                 | SS304        |     |                 | -30°C~120°C     | EPDM            |             |             |        |
| 2               | O-ring    | Same as seat    | Same as seat |     |                 | -20°C~200°C     | FPM             |             |             |        |
|                 |           |                 | 3            |     |                 | Body            | Steel           | Zinc plated | -40°C~200°C | PTFE   |
|                 |           |                 |              |     |                 |                 | Stainless steel | SS316       | 6           | Washer |
| SS304           | SS304     |                 |              |     |                 |                 |                 |             |             |        |
| Aluminum bronze | C95800    | 7               | Screw        |     | Stainless steel | SS316           |                 |             |             |        |
|                 | C95400    |                 |              |     |                 | SS304           |                 |             |             |        |
| 4               | Disc      | Stainless steel | SS316        | 8   | Spring          | Stainless steel | SS321           |             |             |        |
|                 |           |                 | SS304        |     |                 |                 | SS304           |             |             |        |
|                 |           |                 | SS201        |     |                 | Alloy steel     | Inconel         |             |             |        |
|                 |           | Aluminum bronze | C95800       |     |                 |                 |                 |             |             |        |
|                 |           |                 | C95400       |     |                 |                 |                 |             |             |        |

## Chart for medium resistance

| Liner | Suitable for  | Unsuitable for  |
|-------|---|---|
| EPDM  | Water, steam, alcohol, glycol, caustic soda, ozone, food products, glycerine, milk, oxygen, air, saturated salt, iron chloride, gelatine, dry hydrogen sulphide, potassium chloride, sodium, magnesium chloride | Mineral oil, chlorine compounds, ketones, acetyl, chloride, asphalt, bromine, butane, butyl, petrol, diesel oil, acid, fish oil, freon, chlorine, natural gas, exhaust gas, nitric acid |
| NBR   | Mineral oil, grease, air, seawater, gas, boric acid, aluminium chloride, ammonia gas, citric acid, diesel oil, fish oil, petrol, gelatine, glycerine, magnesium chloride, lactic acid, linseed oil, natural gas | Ozone, acetone, aniline, chlorine dioxide, chromic acid, phenol, ethyl acetate, freon 21+22+23, hot nitric acid, styrene, hydrogen sulphide, isopropyl acetate, oxygen, sulphuric acid  |
| FPM   | Oil, mineral acid, grease, phosphorus, tannic acid, gelatine, glycol, oxygen, slaked lime, carbon acid, natural gas, pulp, salt, sugar, sulphur   | Hot water, steam, ketone, ammonia gas, acetone, formaldehyde, cellulose acetate, freon, urea, ethanoic acid, methyl   |
| FPM-B | Acid, alkali, amine hot water, steam  | Gasoline, naphtha, hydrocarbon solvent, chlorine solvent  |
| PTFE  | Resistance to almost any medium   | Molten alkali metals, chlorine trifluoride, Chlorine pentafluoride, liquid fluorine   |
| Metal | According to body/disc material   | According to body/disc material   |

# Fig. 614 Dimensions


Fig. 614 DN25 to DN1000 dimensions

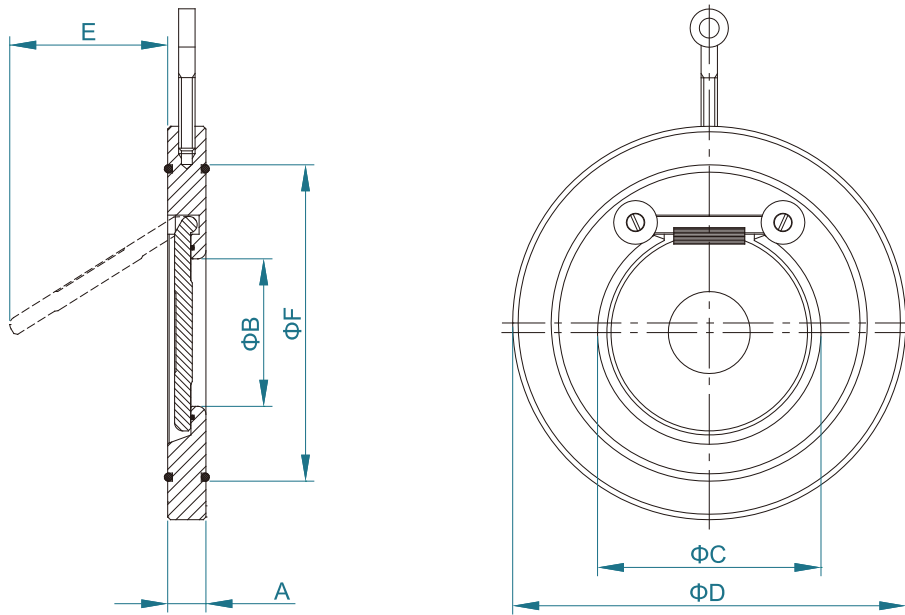

| SIZE   |        | A   | B   | C     | D    |      |      |      |          | E   | F     | Weight [kg] |
|--------|--------|-----|-----|-------|------|------|------|------|----------|-----|-------|-------------|
| DN     | INCH   |     |     |       | PN10 | PN16 | PN25 | PN40 | CLASS150 |     |       |             |
| DN25   | 1"     | 14  | 13  | 29    | 73   | 73   | 73   | 73   | 66.7     | 14  | 63.2  | 0.5         |
| DN32   | 1 1/4" | 14  | 13  | 29    | 84   | 84   | 84   | 84   | 76.2     | 16  | 63.2  | 0.6         |
| DN40   | 1 1/2" | 14  | 22  | 39    | 94   | 94   | 94   | 94   | 85.7     | 25  | 76.2  | 0.9         |
| DN50   | 2"     | 14  | 32  | 48    | 109  | 109  | 109  | 109  | 104.8    | 37  | 86.2  | 1.1         |
| DN65   | 2 1/2" | 14  | 40  | 59    | 129  | 129  | 129  | 129  | 123.8    | 50  | 107.2 | 1.5         |
| DN80   | 3"     | 14  | 54  | 76    | 144  | 144  | 144  | 144  | 136.5    | 61  | 121.2 | 1.8         |
| DN100  | 4"     | 18  | 70  | 96    | 164  | 164  | 170  | 170  | 174.6    | 77  | 146.2 | 3.0         |
| DN125  | 5"     | 18  | 92  | 115   | 194  | 194  | 196  |      | 196.8    | 94  | 175   | 3.4         |
| DN150  | 6"     | 20  | 112 | 138   | 220  | 220  | 226  |      | 222.2    | 100 | 199.2 | 5.4         |
| DN200  | 8"     | 22  | 154 | 183   | 275  | 275  | 286  |      | 279.4    | 152 | 255.2 | 7.7         |
| DN250  | 10"    | 26  | 200 | 232   | 330  | 330  | 343  |      | 339.7    | 180 | 316.2 | 13.2        |
| DN300  | 12"    | 32  | 240 | 272   | 380  | 386  | 403  |      | 409.5    | 215 | 361.2 | 23.3        |
| DN350  | 14"    | 38  | 269 | 305   | 440  | 446  | 460  |      | 450.9    | 245 | 402.4 | 38          |
| DN400  | 16"    | 44  | 308 | 349   | 491  | 498  | 517  |      | 514.4    | 285 | 454.4 | 52.5        |
| DN450  | 18"    | 50  | 360 | 398.6 | 541  | 558  | 567  |      | 549.3    | 335 | 512   | 76.3        |
| DN500  | 20"    | 56  | 405 | 445.4 | 596  | 620  | 627  |      | 606.4    | 398 | 575.2 | 98.5        |
| DN600  | 24"    | 62  | 486 | 529   | 698  | 737  | 734  |      | 717.5    | 453 | 678   | 136         |
| DN700  | 28"    | 67  | 588 | 636   | 813  | 807  |      |      | 831.8    | 512 | 769.6 | 170.5       |
| DN800  | 32"    | 78  | 622 | 687   | 920  | 914  |      |      | 936.8    | 588 |       | 231.2       |
| DN900  | 36"    | 95  | 720 | 794   | 1020 | 1014 |      |      | 1047.7   | 642 |       | 280         |
| DN1000 | 40"    | 105 | 810 | 883   | 1127 | 1131 |      |      | 1162.1   | 723 |       | 354         |

## Fig. 615 Dimensions


Fig. 615 DN25 to DN600 dimensions

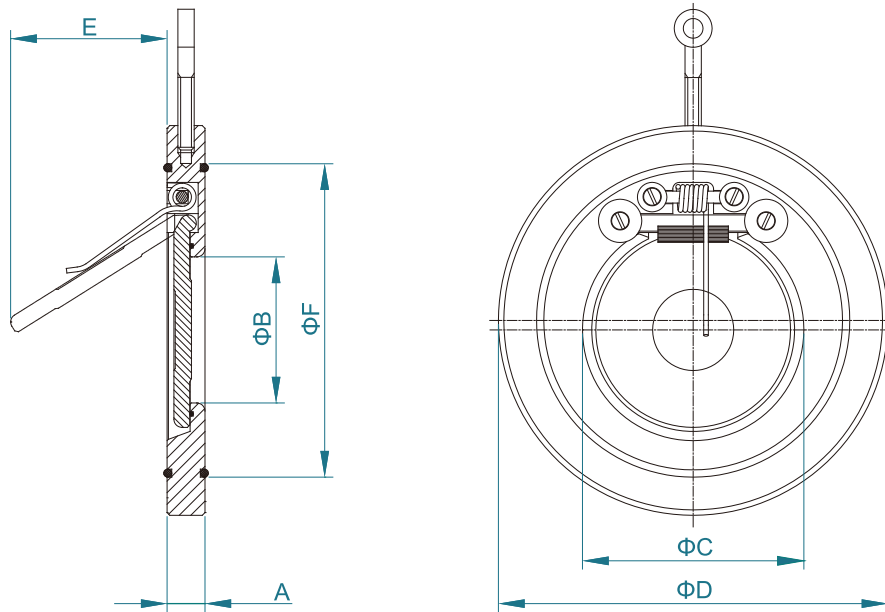

| SIZE  |        | A  | B   | C     | D    |      |      |      |          | E   | F     | Weight [kg] |
|-------|--------|----|-----|-------|------|------|------|------|----------|-----|-------|-------------|
| DN    | INCH   |    |     |       | PN10 | PN16 | PN25 | PN40 | CLASS150 |     |       |             |
| DN25  | 1"     | 14 | 13  | 29    | 73   | 73   | 73   | 73   | 66.7     | 14  | 63.2  | 0.5         |
| DN32  | 1 1/4" | 14 | 13  | 29    | 84   | 84   | 84   | 84   | 76.2     | 16  | 63.2  | 0.6         |
| DN40  | 1 1/2" | 14 | 22  | 39    | 94   | 94   | 94   | 94   | 85.7     | 25  | 76.2  | 0.9         |
| DN50  | 2"     | 14 | 32  | 48    | 109  | 109  | 109  | 109  | 104.8    | 37  | 86.2  | 1.1         |
| DN65  | 2 1/2" | 14 | 40  | 59    | 129  | 129  | 129  | 129  | 123.8    | 50  | 107.2 | 1.5         |
| DN80  | 3"     | 14 | 54  | 76    | 144  | 144  | 144  | 144  | 136.5    | 61  | 121.2 | 1.8         |
| DN100 | 4"     | 18 | 70  | 96    | 164  | 164  | 170  | 170  | 174.6    | 77  | 146.2 | 3.0         |
| DN125 | 5"     | 18 | 92  | 115   | 194  | 194  | 196  |      | 196.8    | 94  | 175   | 3.4         |
| DN150 | 6"     | 20 | 112 | 138   | 220  | 220  | 226  |      | 222.2    | 100 | 199.2 | 5.4         |
| DN200 | 8"     | 22 | 154 | 183   | 275  | 275  | 286  |      | 279.4    | 152 | 255.2 | 7.7         |
| DN250 | 10"    | 26 | 200 | 232   | 330  | 330  | 343  |      | 339.7    | 180 | 316.2 | 13.2        |
| DN300 | 12"    | 32 | 240 | 272   | 380  | 386  | 403  |      | 409.5    | 215 | 361.2 | 23.3        |
| DN350 | 14"    | 38 | 269 | 305   | 440  | 446  | 460  |      | 450.9    | 245 | 402.4 | 38          |
| DN400 | 16"    | 44 | 308 | 349   | 491  | 498  | 517  |      | 514.4    | 285 | 454.4 | 52.5        |
| DN450 | 18"    | 50 | 360 | 398.6 | 541  | 558  | 567  |      | 549.3    | 335 | 512   | 76.3        |
| DN500 | 20"    | 56 | 405 | 445.4 | 596  | 620  | 627  |      | 606.4    | 398 | 575.2 | 98.5        |
| DN600 | 24"    | 62 | 486 | 529   | 698  | 737  | 734  |      | 717.5    | 453 | 678   | 136         |

# Pressure loss

## Pressure loss chart

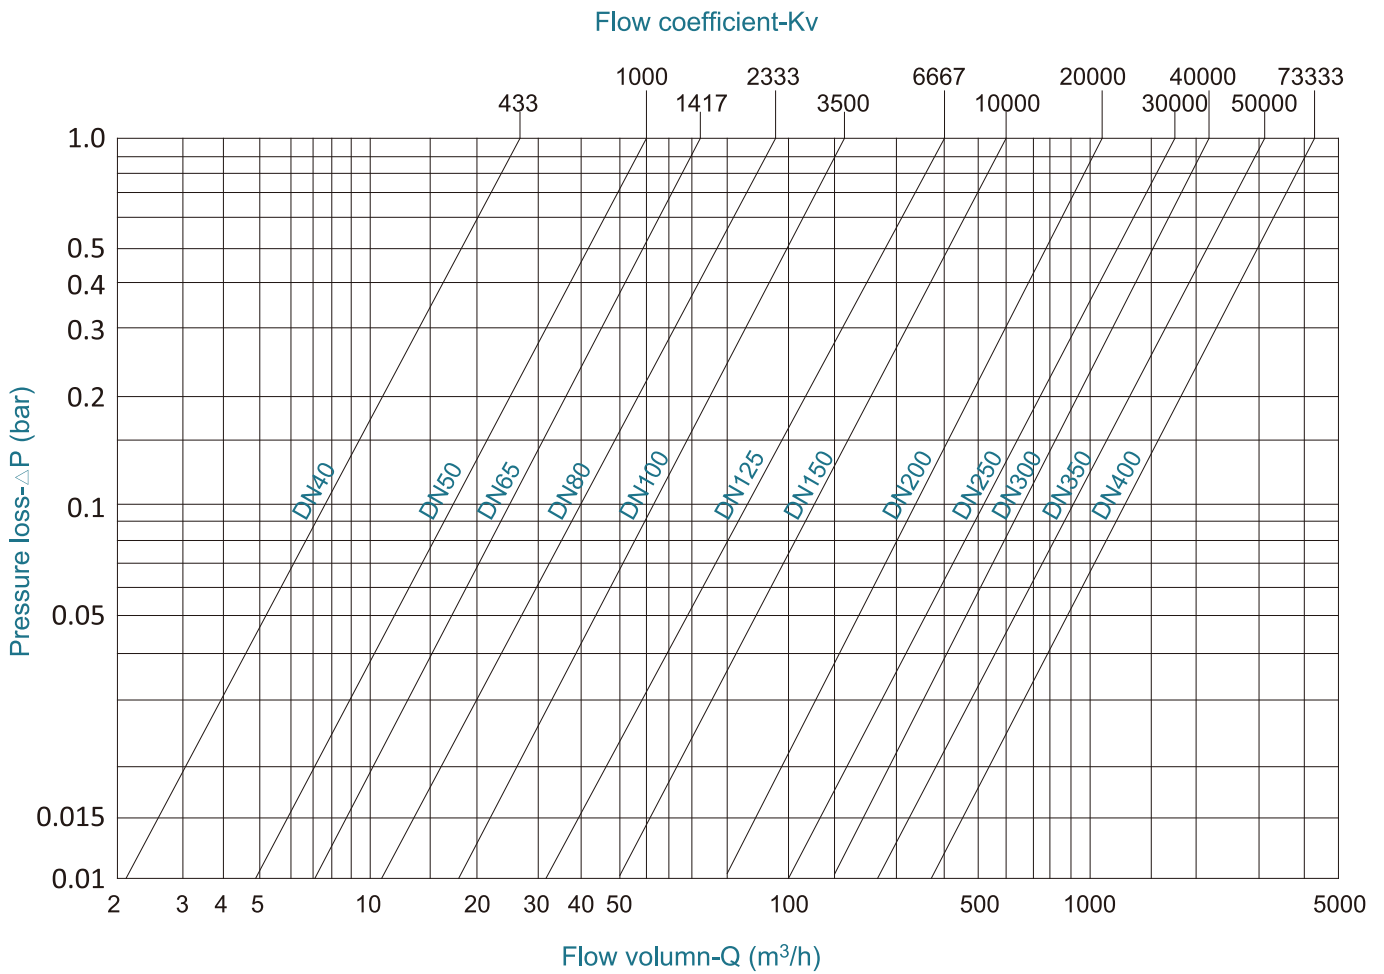

This chart shows the pressure loss- $\Delta P$  over the flow volumn-Q.

The flow coefficient - Kv can be calculated according to the below formula:

**Liquid:**

$$K_V = Q * \sqrt{\frac{W}{\Delta P}}$$

**Gas:**

$$K_V = \frac{V_N}{514} * \sqrt{\frac{G * T}{\Delta P * P_d}}$$

- K<sub>V</sub>: Flow coefficient
- Q: Maximum flow volumn, m<sup>3</sup>/h
- W: Exact weight, kg/m<sup>3</sup>
- $\Delta P$ : Pressure loss, bar
- V<sub>N</sub>: Maximum flow, Nm<sup>3</sup>/h
- G: Exact weight, kg/Nm<sup>3</sup>
- T: Absolute temperature, Kelvin
- P<sub>d</sub>: Absolute pressure downstream, bar




# Opening pressure and pressure temperature rating

## Opening pressure—zero flow differential pressure(mbar)

| SIZE   |        | 6140 Without spring |               | 6141 With spring |               |
|--------|--------|---------------------|---------------|------------------|---------------|
| DN     | INCH   | Horizontal flow     | Vertical flow | Horizontal flow  | Vertical flow |
| DN25   | 1"     | 0.3                 | 5             | 7                | 12            |
| DN32   | 1 1/4" | 0.3                 | 5             | 7                | 12            |
| DN40   | 1 1/2" | 0.3                 | 5             | 7                | 12            |
| DN50   | 2"     | 0.3                 | 5             | 7                | 12            |
| DN65   | 2 1/2" | 0.3                 | 7             | 7                | 14            |
| DN80   | 3"     | 0.3                 | 10            | 7                | 17            |
| DN100  | 4"     | 0.3                 | 12            | 8                | 20            |
| DN125  | 5"     | 0.3                 | 12            | 8                | 20            |
| DN150  | 6"     | 0.3                 | 18            | 8                | 26            |
| DN200  | 8"     | 0.3                 | 20            | 8                | 28            |
| DN250  | 10"    | 0.3                 | 20            | 8                | 28            |
| DN300  | 12"    | 0.3                 | 25            | 8                | 33            |
| DN350  | 14"    | 0.3                 | 25            | 9                | 34            |
| DN400  | 16"    | 0.3                 | 25            | 9                | 34            |
| DN450  | 18"    | 0.3                 | 30            | 9                | 39            |
| DN500  | 20"    | 0.3                 | 30            | 9                | 39            |
| DN600  | 24"    | 0.3                 | 35            | 9                | 44            |
| DN700  | 28"    | 0.3                 | 35            |                  |               |
| DN800  | 32"    | 0.3                 | 35            |                  |               |
| DN900  | 36"    | 0.3                 | 40            |                  |               |
| DN1000 | 40"    | 0.3                 | 45            |                  |               |

## Pressure temperature curve

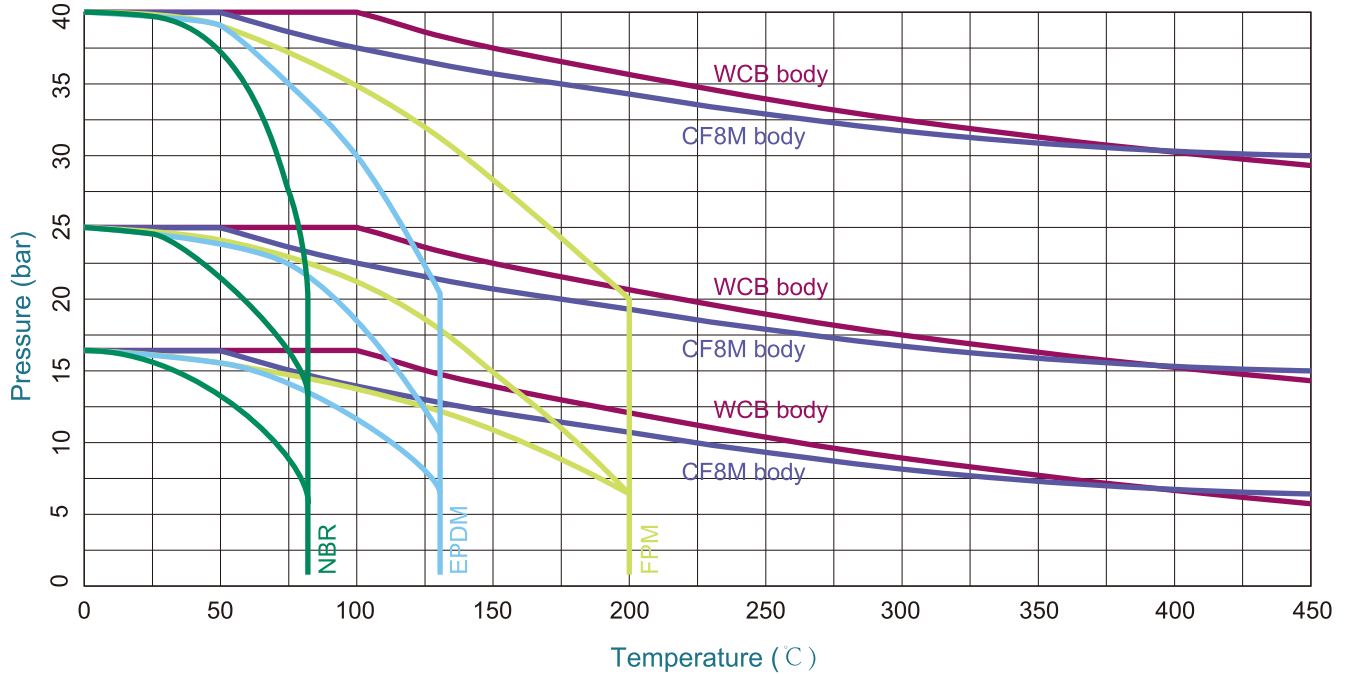

**Coreline**

The contents of this catalogue are confidential and proprietary to Coreline, we reserve the right to change the specifications without any notice.

**CORELINE LTD.**

Add: No.4 Wangjiang Road, Muqiao Town, Zhengpugang New District, 238200 Hexian, Ma'anshan City, Anhui Province, China

Http: // [www.coreline.dk](http://www.coreline.dk)

E-mail: [mail@coreline.cn](mailto:mail@coreline.cn)